
14-Port Gigabit Industrial Managed Switch

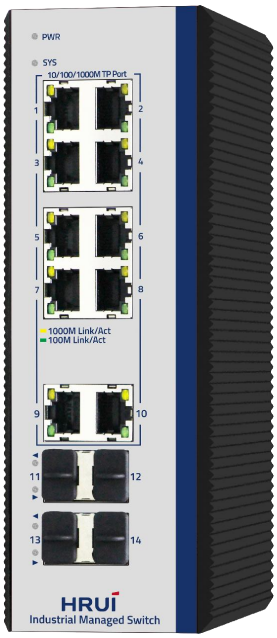

Product Highlights

- Support: IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3z / AB, IEEE802.1Q, IEEE802.1p, IEEE802.1d/w
- Support Spanning Tree STP (802.1D) and RSTP (802.1w), MSTP (802.1s), ERPS
- Support SNMP v1/v2/v3 Simple Network Management Protocol
- Support IGMP Snooping, static multicast filtering, and MLD Snooping filtering
- Support 802.1x port authentication and AAA authentication to enhance network security
- Support WEB, Telnet, CLI, SSH management
- IP40 protection level, high-strength aluminum profile shell, DIN35 rail installation
- Industrial grade 4-level design, operating temperature from -40~75°C
- Support redundant power supply connection and anti reverse connection
- Comply with EMC EN55032 standard

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd

Hardware Features

Description	Specification
Model	HR600-SWG20824AS
Interface	8*1Gbps RJ45 ports 2*1Gbps Uplink ports 4*1Gbps SFP ports (Ports 13-14 support 2.5G, Comply with 1.25G/155M) 1*Console port
Port Standard	IEEE802.3 (Ethernet) IEEE802.3u (Fast Ethernet) IEEE 802.3ab (Gigabit Ethernet) IEEE 802.3z (Gigabit Ethernet Fiber Standard) IEEE802.3x (Flow Control) IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1D Spanning Tree Protocol
Switching Bandwidth	34Gbps
Packet Forwarding Rate	25.29Mpps
Packet Buffer	4Mbit
MAC Address Table	8K
Jumbo Frame	Up to 9600bytes
VLAN	VLAN range 1-4094, maximum active VLAN is 4K
Transmission Method	Store and Forward
Power Supply	DC12~55V Power wiring: 4 PIN industrial terminals (redundant V1+V1-, V2+V2-)

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd

Hardware Features

Description	Specification
Mainboard Power Consumption	6.278W
Structure Information	Product Dimensions: 187*128*62.8mm Packaging Dimensions: 242*207*86mm Product Net Weight: 1KG Product Gross Weight: 1.3KG
Packing Information	Carton Dimensions: 445*445*510mm Packing Quantity: 20PCS Packing Weight: 27KG
Package Contents	Switch 1pcs, Manual 1pcs, Certificate of Inspection 1pcs, Serial cable 1pcs
Fan Quantity	0
Installation	Desktop, Wall mounting installation, Rail installation
Surge Protection	Port Surge: Common mode 6KV, Differential mode 2KV Electrostatic ESD: Air 15KV, Contact 8KV (Class C)
Operating Temperature	-40~75°C
Storage Temperature	-40~85°C
Operation Humidity	10%~90%, non condensing
Storage Humidity	5%~95%, non condensing
PWR Green LED	On: Powered on Off: Powered off
SYS Green LED	On: The system is running normally Flashing: System startup in progress
Ports 1-10	Yellow LED on: 1Gbps Link normal Green LED on: 10/100Mbps Link normal Off: Link blocked Fast Flashing: Data transmitting
Ports G11-G14 Green LED	On: Fiber optic link normal Off: Fiber optic link blocked Flashing: Link data transmission
Reset	Short press to restart, long press for 6 seconds to restore factory settings

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd

Software Features

Description	Specification
L2 Function	
IPv4	IPv4 VLAN Interface IPv4 Static Routes ARP
Port	Port Switch configuration Port Description configuration Port Speed configuration Port Duplex configuration Port Flow Control configuration Jumbo Frame EEE Fiber Module(DDM)
Link Aggregation	Support load balance policy; Base on MAC and IP-MAC Static and Dynamic Group Support LACP
Storm Control	Boardcast suppression Unknown Multicast Unknown Unicast
Port Mirroring	One to one monitor Many to one monitor Ingress/Egress/Both
Port Security	MAC Address Constraints Action：Trap/Shutdown
Port Isolation	Support
Port Rate-limit	Support
Loopback Detection	Support
VLAN	Access/Trunk/Hybrid VLAN Tunnel (Q-in-Q Tunnel) GVRP VLAN range 1-4094, maximum active VLAN is 4K

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd

Software Features

Description	Specification
MAC Address	Dynamic MAC address Static MAC address
Spanning Tree Protocol	STP/RSTP/MSTP BPDU Filter BPDU Guard Edge Port
ERPS	Major and sub ring up to 16 rings
Smart Ring	Private Ring Major and sub ring Up to 16 rings
PTP	Ordinary Clock Boundary Clock Transparent clock
LLDP	Support
Multicast	IGMP Snooping IGMP V1/V2/V3 Router Port Static IGMP group address IGMP groups filtering Querier MLD Snooping
QoS	Traffic classification based, Strict priority and WRR Port Priority 802.1P Priority IP DSCP Priority Support up to 8 queues per port Port Shaping

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd

Software Features

Description	Specification
Services	
DHCP	DHCP Server
	IP Pool
	Static Binding
	DHCP Relay
Access Protocol	HTTP
	Telnet
	SSH
	Manager ACL
Security	
AAA	RADIUS
	TACACS+
	802.1X
	Base on port/MAC/local/WEB
DHCP Snooping	Support

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd

Software Features

Description	Specification
IP Source Guard	Support
Dynamic ARP Inspection	Support
ACL	MAC ACL Port ACL IPv4 ACL IPv6 ACL
Diagnostics	
Syslog	Logging Message Remote Server
Ping	Support
Traceroute	Support
Cable Diagnositics	Support
Equipment Management	
Manager Access	Console HTTP Telnet SSHv2 SNMP
Manager IP	Static Address DHCP Client Support IPv4 and IPv6 address DNS
Time Synchronization	SNTP Manual Time
SNMP	V1/V2C/V3 Community V3 User Group Trap Host

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd

Software Features


Description	Specification
SNMP MIB	RFC 1213 MIB-II RFC 1493 Bridge MIB RFC 1643 Ethernet MIB RFC 2819 RMON MIB (Groups 1, 2, 3 and 9) RFC 2863 Interface MIB Private MIB
RMON	Statistics History Configuration Event Configuration Alarm Configuration
User Management	Congurable user privilege level from 0 - 15;
Firmware Management	Firmware upgrade Double Image; Swap between Active and Alternate firmware image.
Configuration Management	Upload and download
Save	Support
Restart	Support
Factory Defaults	Support
Standard Compliance	
IEEE 802.3x flow control and back pressure	
IEEE 802.3ad port trunk with LACP	
IEEE 802.1D Spanning Tree Protocol	
IEEE 802.1w Rapid Spanning Tree Protocol	
IEEE 802.1s Multiple Spanning Tree Protocol	
IEEE 802.1p Class of Service	
IEEE 802.1Q VLAN tagging	
IEEE 802.1x Port Authentication Network Control	
IEEE 802.1ab LLDP	
RFC 768 UDP	
RFC 793 TFTP	
RFC 791 IP	

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd

Software Features

Description	Specification
RFC 792 ICMP	
RFC 2068 HTTP	
RFC 1112 IGMP v1	
RFC 2236 IGMP v2	
RFC 3376 IGMP v3	
RFC 2710 MLD v1	
FRC 3810 MLD v2	

Product Structure Diagram

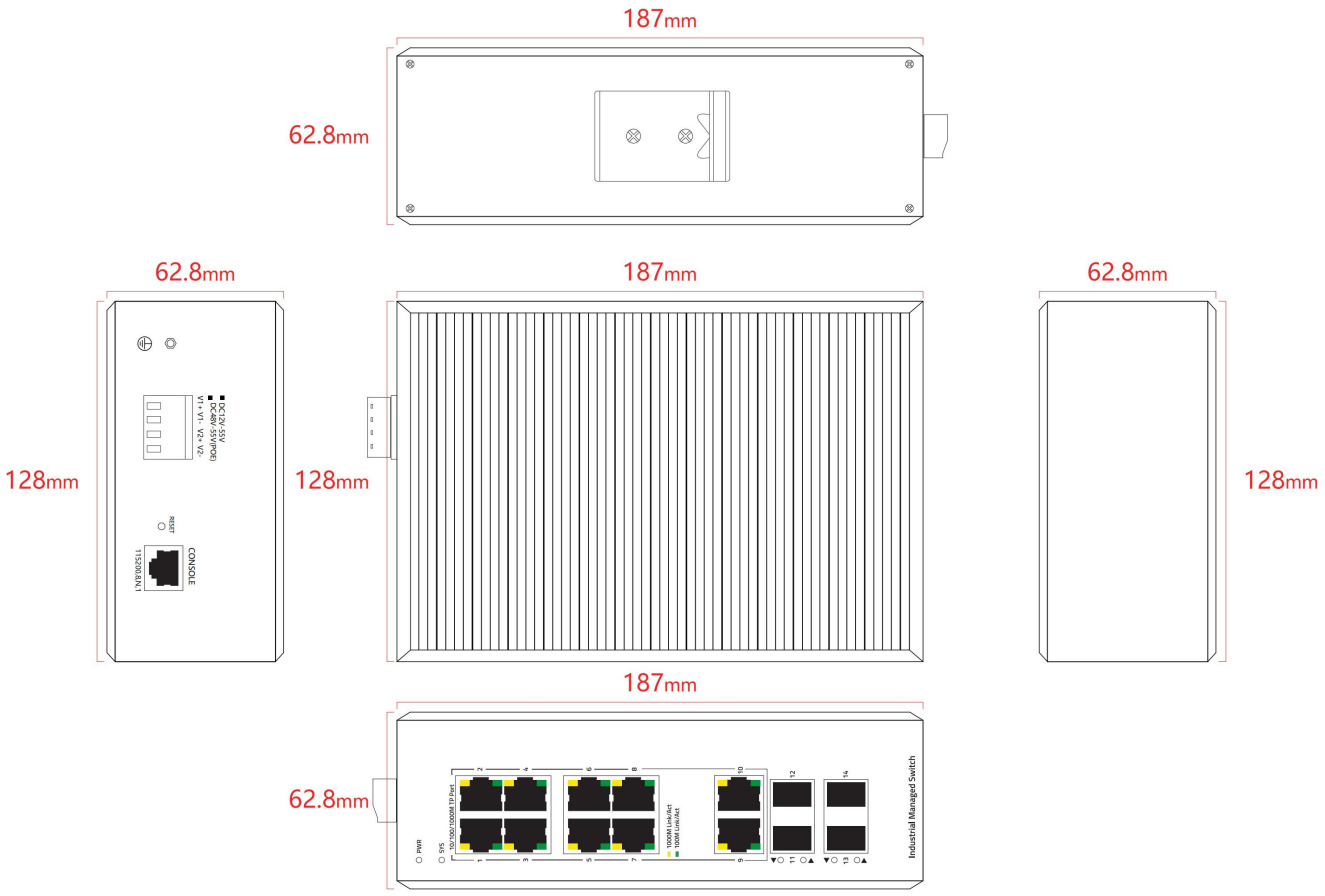

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd